

METALLIZED POLYPROPYLENE FILM CAPACITOR-X2

NON-INDUCTIVELY (UL940V-0) PLASTIC CASE SEALED WITH EPOXY RESIN




TS08

FEATURES

- Provides interference suppression with UL, VDE, CSA, SEMKO, DEMKO, NEMKO, SEV, FIMKO, IMQ, ÖVE, CEBEC, KEMA safety approvals.
- High du/dt capabilities.

SPECIFICATIONS

VOLTAGE RATING	275/250VAC
CAPACITANCE RANGE	0.0047 – 1.0 Mfd
CAPACITANCE TOLERANCE	±10%std. ±5%
WORKING VOLTAGE	275/250 VAC. 50/60 Hz
OPERATING TEMPERATURE	-40°C to 85°C
DIELECTRIC STRENGTH	2100 VDC for 1 sec.
DISSIPATION FACTOR	0.08% max at 1KHz 20°C 0.3% max at 10KHz 20°C
INSULATION RESISTANCE	1.R.≥30,000MΩ (C≤0.33μF) 1.R.≥10,000MΩ (C>0.33μF)

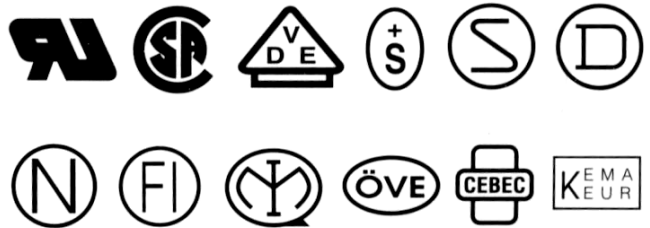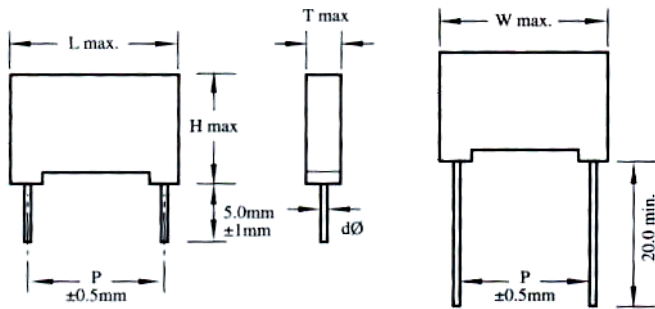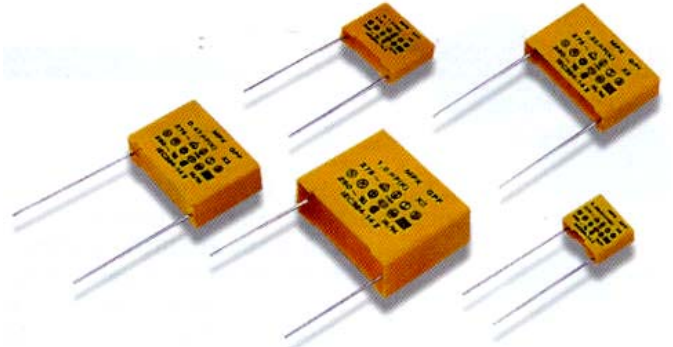

(Unit : mm)

A type											
CAP	W	H	T	P	d Ø	CAP	W	H	T	P	d Ø
0.001	13.0	9.0	4.0	10.0	0.6	0.068	18.0	12.0	6.0	15.0	0.8
0.0012	13.0	9.0	4.0	10.0	0.6	0.082	18.0	12.0	6.0	15.0	0.8
0.0015	13.0	9.0	4.0	10.0	0.6	0.1	18.0	13.5	6.0	15.0	0.8
0.0018	13.0	9.0	4.0	10.0	0.6	0.12	18.0	13.0	7.5	15.0	0.8
0.0022	13.0	9.0	4.0	10.0	0.6	0.15	18.0	14.5	8.5	15.0	0.8
0.0027	13.0	9.0	4.0	10.0	0.6	0.15	26.5	15.0	6.0	22.5	0.8
0.0033	13.0	9.0	4.0	10.0	0.6	0.18	26.5	16.5	7.0	22.5	0.8
0.0039	13.0	9.0	4.0	10.0	0.6	0.22	26.5	16.5	7.0	22.5	0.8
0.0047	13.0	11.0	5.0	10.0	0.6	0.27	26.5	17.0	8.5	22.5	0.8
0.0056	13.0	11.0	5.0	10.0	0.6	0.33	26.5	17.0	8.5	22.5	0.8
0.0068	13.0	11.0	5.0	10.0	0.6	0.39	26.5	19.0	10.0	22.5	0.8
0.0082	13.0	11.0	5.0	10.0	0.6	0.47	26.5	19.0	10.0	22.5	0.8
0.01	13.0	11.0	5.0	10.0	0.6	0.47	32.0	20.0	11.0	27.5	0.8
0.012	13.0	11.0	5.0	10.0	0.6	0.56	32.0	20.0	11.0	27.5	0.8
0.015	13.0	11.0	5.0	10.0	0.6	0.68	32.0	20.0	11.0	27.5	0.8
0.018	13.0	12.0	6.0	10.0	0.6	0.82	32.0	22.0	13.0	27.5	0.8
0.022	13.0	12.0	6.0	10.0	0.6	1.0	32.0	22.0	13.0	27.5	0.8
0.027	13.0	12.0	6.0	10.0	0.6	1.0	37.0	25.0	13.5	31.5	0.8
0.033	18.0	11.0	5.0	15.0	0.8	1.2	37.0	25.0	13.5	31.5	0.8
0.039	18.0	12.0	6.0	15.0	0.8	1.5	37.0	26.5	17.0	31.5	0.8
0.047	18.0	11.0	5.0	15.0	0.8	1.8	37.0	29.0	19.0	31.5	0.8
0.056	18.0	12.0	6.0	15.0	0.8	2.2	37.0	29.0	19.0	31.5	0.8
B type											
CAP	W	H	T	P	d Ø	CAP	W	H	T	P	d Ø
0.1	18.0	12.0	6.0	15.0	0.8	0.33	26.5	16.5	7.0	22.5	0.8
0.18	18.0	14.5	8.5	15.0	0.8	0.47	26.5	17.0	8.5	22.5	0.8
0.22	18.0	14.5	8.5	15.0	0.8	0.68	26.5	19.0	10.0	22.5	0.8
0.33	18.0	16.0	10.0	15.0	0.8	1.0	32.0	20.0	11.0	22.5	0.8

* Please contact us for special item or size not listed